



**PANELITE GLAZED SYSTEM**


<b>Product Spec</b>	<b>See Panel Options and Product Codes Below</b>
System Core Panel	All Bonded Series Panel Types
Glass Lite Options	See below

Panel Max Dimension	39.4" x 118.7" (1m x 3m)
Overall System Thickness	1-1/2" (33mm)
Honeycomb Pattern	See Panel Type Data sheet

LEED Section	Credit No.	Description
Indoor Environmental Quality	8.1, 8.2, 8.3	Daylighting + Views
Innovation in Design	ID 1.1 - 1.4	Innovation in Design
Materials and Resources	4	Recycled Content
Materials and Resources	2.1, 2.2	Construction Materials Waste Mgt

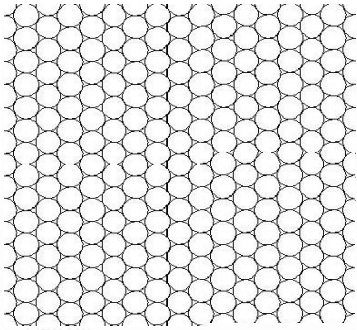

Daylighting + Views	Transparent	Satin
Light Transmission	55-75%	50-75%
Views	Yes	No

Properties	System
STC Rating	36-42
Weight PSF	7.75 lbs PSF
Fire Rating Classification	Class B
ATME-84-Flame Spread	30
ATME-84-Smoke Developed	400

Applications + Compatible Details	
Partitions	ClearConnect - Pre-Fab On-Site Fabricated
Doors	Sliding Pivoting
Backlit Wall	ClearConnect - Pre-Fab On-Site Fabricated
Ceilings	ClearConnect - Pre-Fab On-Site Fabricated

**PANELITE GLAZED SYSTEM SPEC (EX. ABOVE)**

Outboard Glass Lite: 6mm Clear  
 Core B-TCCT, 15mm Lightben Clear Trans  
 Inboard Glass Lite: 6mm Clear

**PANELITE CORE OPTIONS - FULL COLOR RANGE AVAILABLE**

From Left to Right


STARLIGHT

HEXABEN

HEXABEN LARGE

LIGHTBEN

KAOS

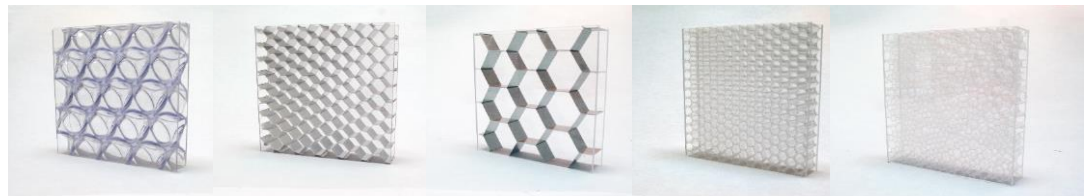
**GLASS LITE OPTIONS**



From Left to Right

CLEAR


GREEN, LIGHT

BLUE, LIGHT

SMOKE, LIGHT




Internal Panelite Butt Joint

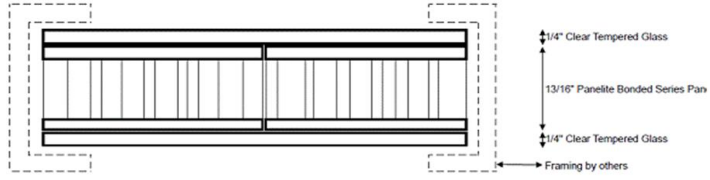

Assembly: Glass + Panelite + Glass  
1-3/8" Overall Panel Assembly (Framing and Tolerance Excluded)

Fire Rating: Glass Outer Surface: Non-Combustible  
Panelite (encapsulated): Not Rated


Framing: Perimeter Framing by Others

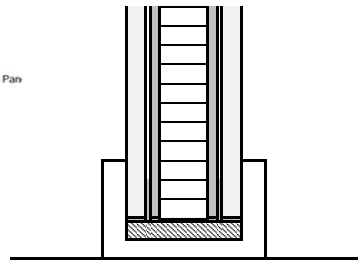

PLAN

SECTION

Aligned Butt Joint

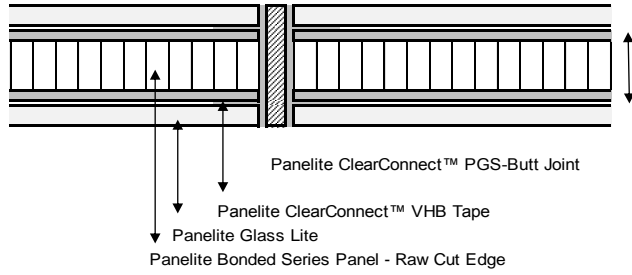


Panelite ClearConnect™ PGS-Butt Joint

Panelite ClearConnect™ VHB Tape

Panelite Glass Lite

Panelite Bonded Series Panel - Raw Cut Edge

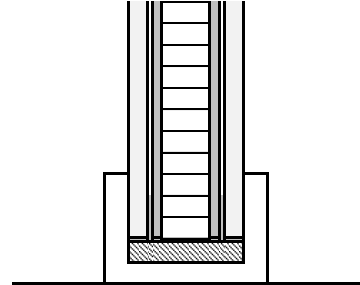

PLAN

SECTION